Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

August 2000

National Semiconductor

Jameco Part Number 143896

LM837
Low Noise Quad Operational Amplifier

General Description

The LM837 is a quad operational amplifier designed for low noise, high speed and wide bandwidth performance. It has a new type of output stage which can drive a 600Ω load, making it ideal for almost all digital audio, graphic equalizer, preamplifiers, and professional audio applications. Its high performance characteristics also make it suitable for instrumentation applications where low noise is the key consideration.

The LM837 is internally compensated for unity gain operation. It is pin compatible with most other standard quad op amps and can therefore be used to upgrade existing systems with little or no change.

Features

- High slew rate — 10 V/µs (typ); 8 V/µs (min)
- Wide gain bandwidth product (min) — 25 MHz (typ); 15 MHz
- Power bandwidth — 200 kHz (typ)
- High output current — ±40 mA
- Excellent output drive performance — >600Ω
- Low input noise voltage — 4.5 nV/$\sqrt{Hz}$
- Low total harmonic distortion — 0.0015%
- Low offset voltage — 0.3 mV

Schematic and Connection Diagrams

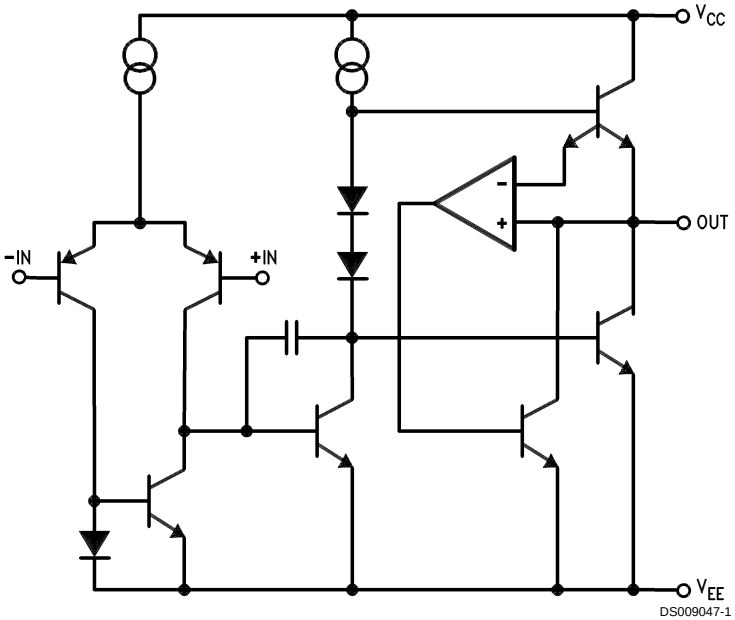

DS009047-1

Dual-In-Line Package



DS009047-2

Top View
Order Number LM837M, LM837MX or LM837N
See NS Package Number M14A or N14A

© 2000 National Semiconductor Corporation

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Supply Voltage, V_{CC}/V_{EE}	±18V
Differential Input Voltage, V_{ID} (Note 2)	±30V
Common Mode Input Voltage, V_{IC} (Note 2)	±15V
Power Dissipation, P_D (Note 3)	1.2W (N) 830 mW (M)
Operating Temperature Range, T_{OPR}	−40˚C to +85˚C
Storage Temperature Range, T_{STG}	−60˚C to +150˚C
Soldering Information	
Dual-In-Line Package Soldering (10 seconds)	260˚C
Small Outline Package Vapor Phase (60 seconds)	215˚C
Infrared (15 seconds)	220˚C

ESD rating to be determined.

See AN-450 “Surface Mounting Methods and Their Effect on Product Reliability” for other methods of soldering surface mount devices.

DC Electrical Characteristics

T_A = 25˚C, V_S = ±15V

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_{OS}	Input Offset Voltage	R_S = 50Ω		0.3	5	mV
I_{OS}	Input Offset Current			10	200	nA
I_B	Input Bias Current			500	1000	nA
A_V	Large Signal Voltage Gain	R_L = 2 kΩ, V_{OUT} = ±10V	90	110		dB
V_{OM}	Output Voltage Swing	R_L = 2 kΩ	±12	±13.5		V
		R_L = 600Ω	±10	±12.5		V
V_{CM}	Common Mode Input Voltage		±12	±14.0		V
CMRR	Common Mode Rejection Ratio	V_{IN} = ±12V	80	100		dB
PSRR	Power Supply Rejection Ratio	V_S = 15 ~ 5, −15 ~ −5	80	100		dB
I_S	Power Supply Current	R_L = ∞, Four Amps		10	15	mA

AC Electrical Characteristics

T_A = 25˚C, V_S = ±15V

Symbol	Parameter	Condition	Min	Typ	Max	Units
SR	Slew Rate	R_L = 600Ω	8	10		V/µs
GBW	Gain Bandwidth Product	f = 100 kHz, R_L = 600Ω	15	25		MHz

Design Electrical Characteristics

T_A= 25˚C, V_S=±15V (Note 4)

Symbol	Parameter	Condition	Min	Typ	Max	Units
PBW	Power Bandwidth	V_O = 25 V_{P-P}, R_L = 600Ω, THD < 1%		200		kHz
e_{n1}	Equivalent Input Noise Voltage	JIS A, R_S = 100Ω		0.5		µV
e_{n2}	Equivalent Input Noise Voltage	f = 1 kHz		4.5		nV/$\sqrt{Hz}$
i_n	Equivalent Input Noise Current	f = 1 kHz		0.7		pA/$\sqrt{Hz}$
THD	Total Harmonic Distortion	A_V = 1, V_{OUT} = 3 Vrms, f = 20 ~ 20 kHz, R_L = 600Ω		0.0015		%
f_U	Zero Cross Frequency	Open Loop		12		MHz
ϕ_m	Phase Margin	Open Loop		45		deg
	Input-Referred Crosstalk	f = 20 ~ 20 kHz		−120		dB
$\Delta V_{OS}/\Delta T$	Average TC of Input Offset Voltage			2		µV/˚C

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given, however, the typical value is a good indication of device performance.

Note 2: Unless otherwise specified the absolute maximum input voltage is equal to the power supply voltage.

Design Electrical Characteristics (Continued)

Note 3: For operation at ambient temperatures above 25˚C, the device must be derated based on a 150˚C maximum junction temperature and a thermal resistance, junction to ambient, as follows: LM837N, 90˚C/W; LM837M, 150˚C/W.

Note 4: The following parameters are not tested or guaranteed.

Detailed Schematic

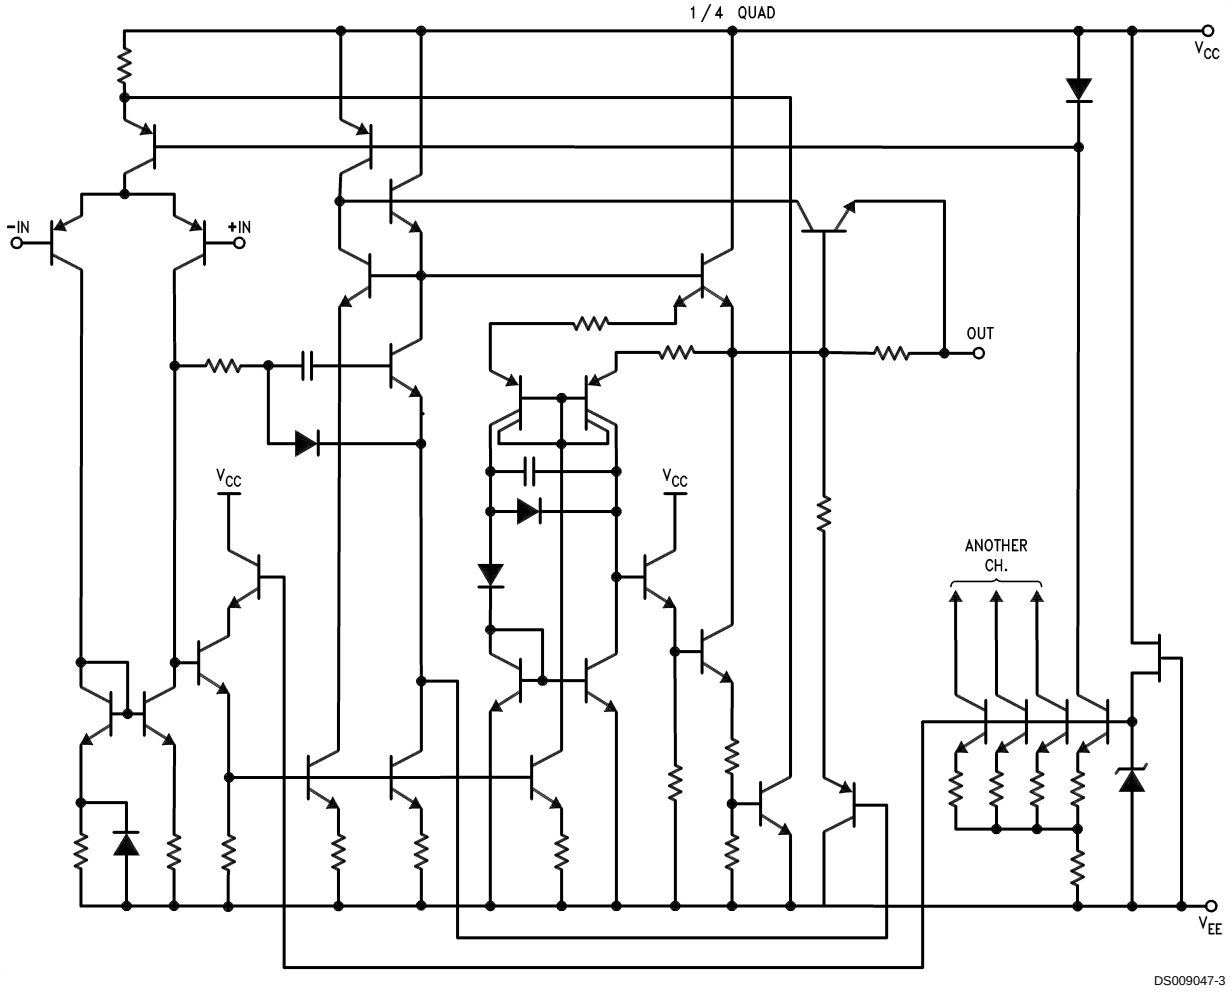

DS009047-3

Typical Performance Characteristics

Maximum Power Dissipation vs Ambient Temperature

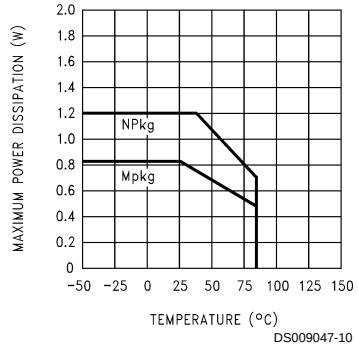

DS009047-10

Normalized Input Bias Current vs Supply Voltage

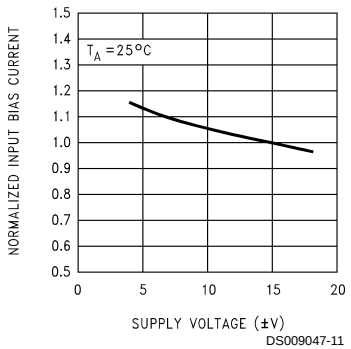

DS009047-11

Normalized Input Bias Current vs Ambient Temperature

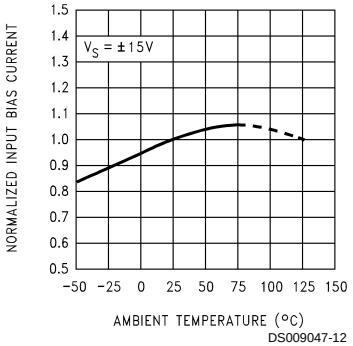

DS009047-12

Typical Performance Characteristics (Continued)

Supply Current vs Supply Voltage

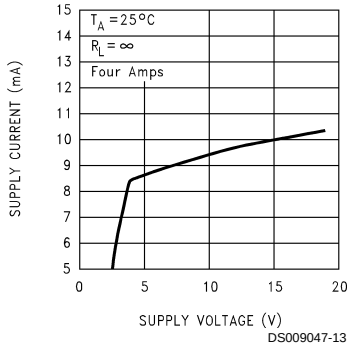

DS009047-13

Supply Current vs Ambient Temperature

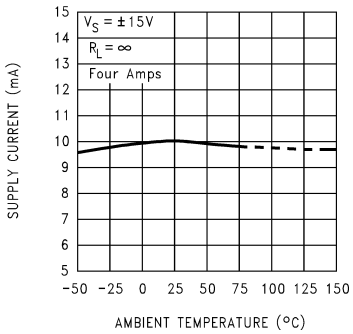

DS009047-14

Positive Current Limit

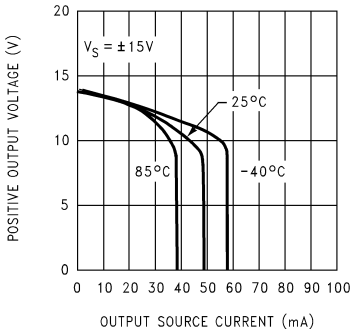

DS009047-15

Negative Current Limit

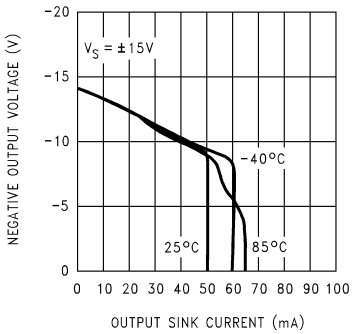

DS009047-16

Maximum Output Voltage vs Supply Voltage

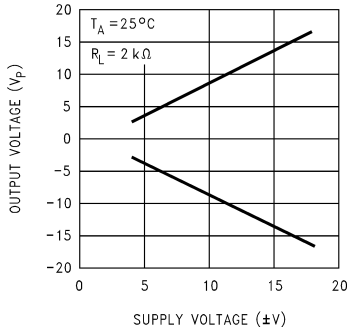

DS009047-17

Maximum Output Voltage vs Supply Voltage

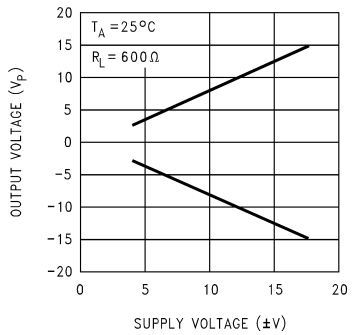

DS009047-18

Maximum Output Voltage vs Ambient Temperature

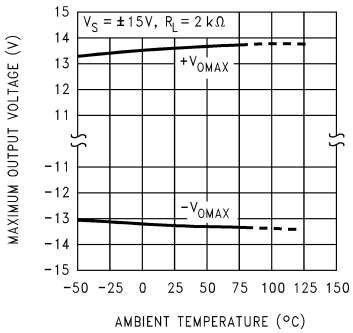

DS009047-19

Maximum Output Voltage vs Ambient Temperature

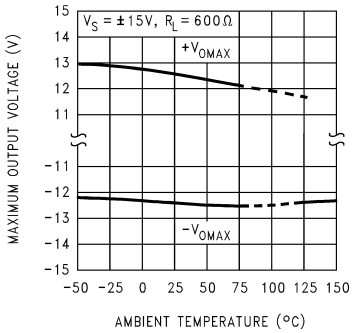

DS009047-20

Power Bandwidth

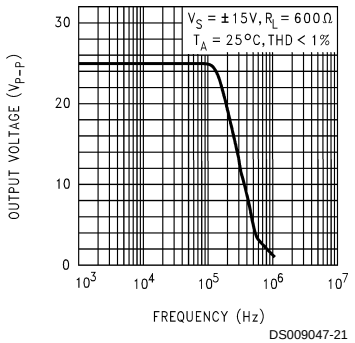

DS009047-21

Typical Performance Characteristics (Continued)

Normalized Slew Rate & Gain Bandwidth vs Supply Voltage (f = 100 kHz)

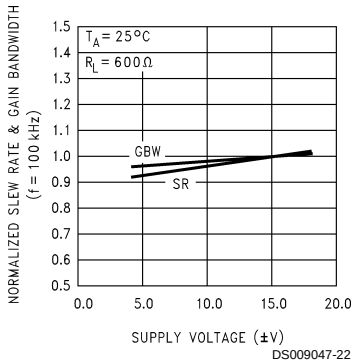

DS009047-22

Normalized Slew Rate & Gain Bandwidth (f = 100 kHz) vs Ambient Temperature

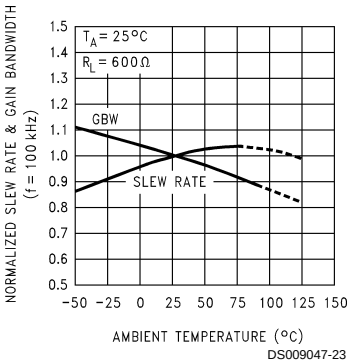

DS009047-23

Voltage Gain vs Supply Voltage



DS009047-24

Voltage Gain vs Ambient Temperature

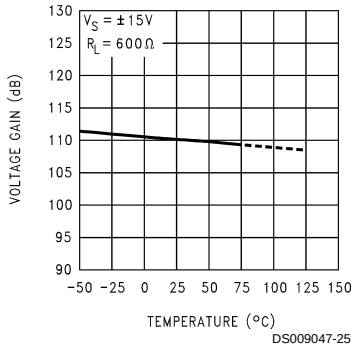

DS009047-25

Power Supply Rejection vs Frequency

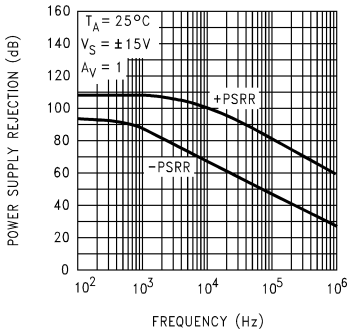

DS009047-26

CMRR vs Frequency

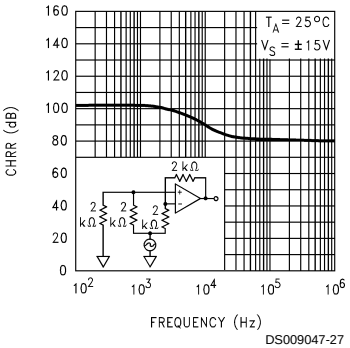

DS009047-27

Open Loop Gain & Phase vs Frequency

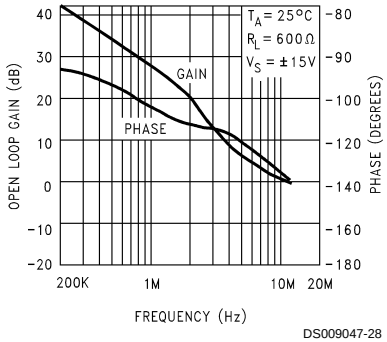

DS009047-28

Total Harmonic Distortion vs Frequency

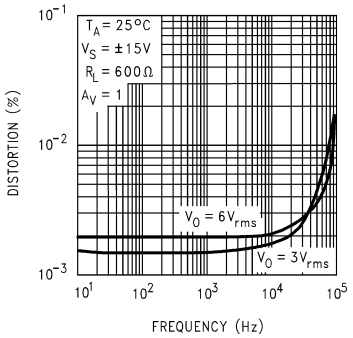

DS009047-29

Equivalent Input Noise Voltage vs Frequency

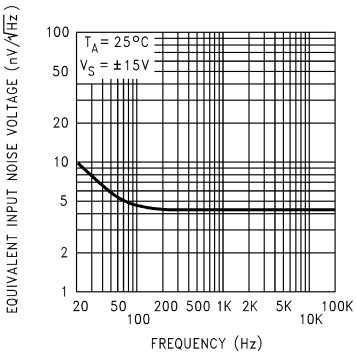

DS009047-30

Typical Performance Characteristics (Continued)

Equivalent Input Noise Current vs Frequency

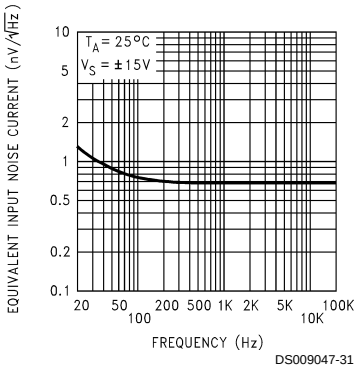

DS009047-31

Small Signal, Non-Inverting
T_A = 25˚C, A_V = 1, R_L = 600Ω, V_S = ±15V

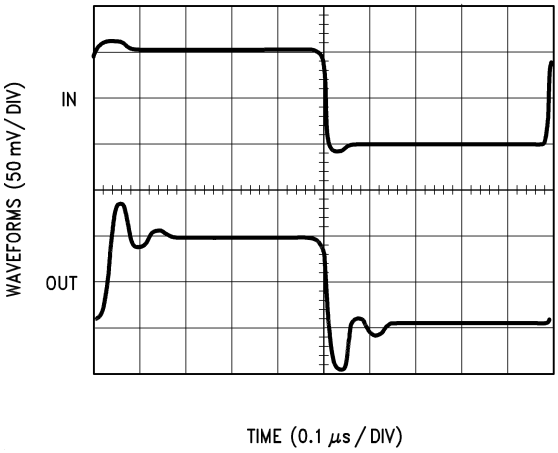

DS009047-6

Current Limit
T_A = 25˚C, V_S = ±15V, R_L = 100Ω, A_V = 1

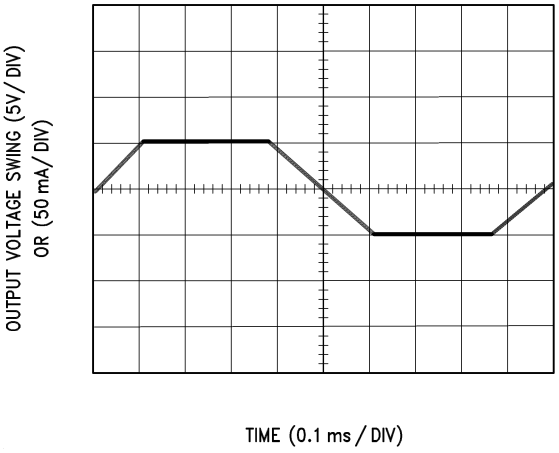

DS009047-7

Large Signal Non-Inverting
T_A = 25˚C, R_L = 600Ω, V_S = ±15V

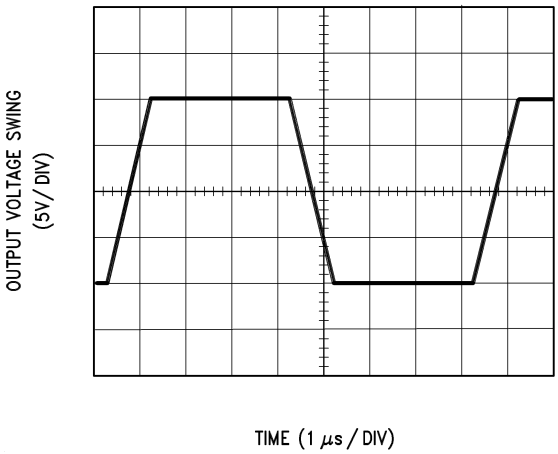

DS009047-8

Large Signal Inverting
T_A = 25˚C, R_L = 600Ω, V_S = ±15V

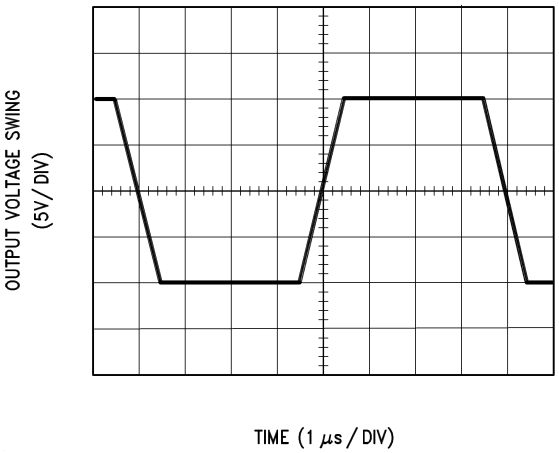

DS009047-9

Physical Dimensions inches (millimeters) unless otherwise noted

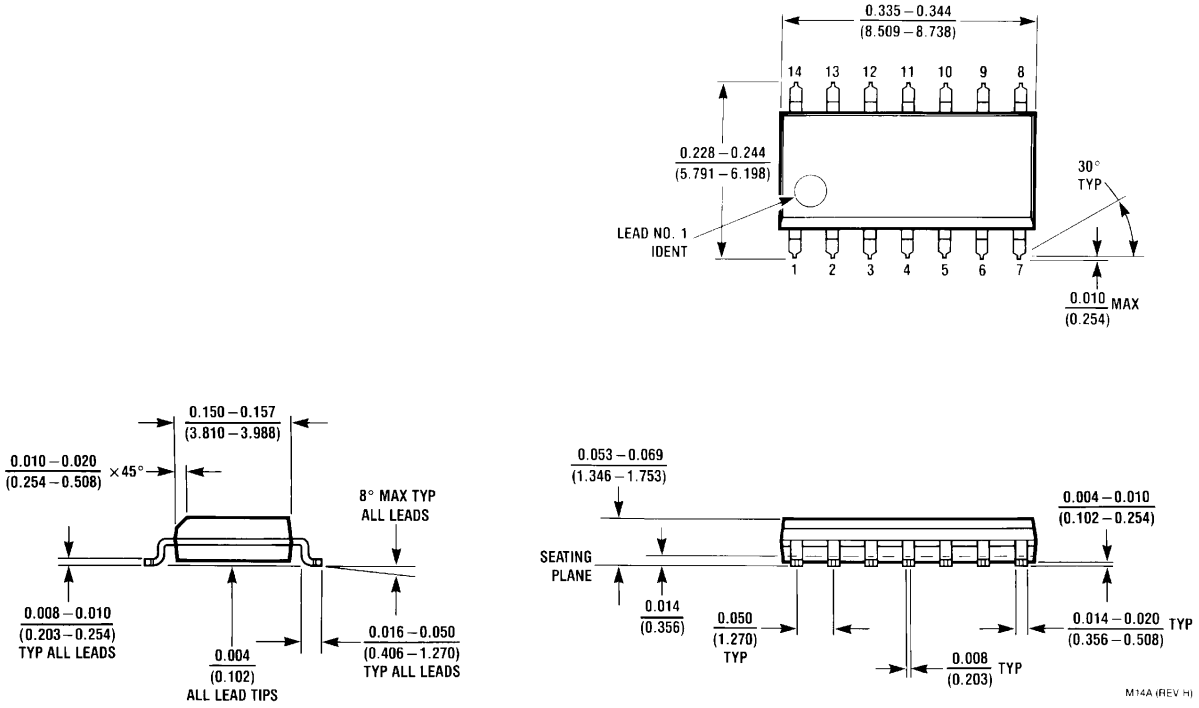

Molded Package (SO)
Order Number LM837M or LM837MX
NS Package Number M14A

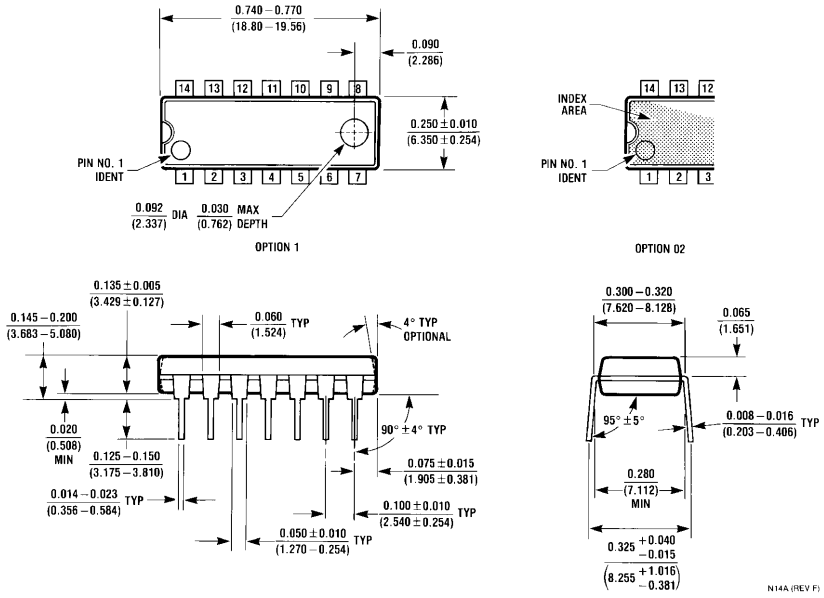

Lit. #107255
Molded Dual-In-Line Package
Order Number LM837N
NS Package Number N14A

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 87 90

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Email: nsj.crc@jksmtp.nsc.com
Fax: 81-3-5639-7507

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.